

DSR-C 8X30

Granular Activated Carbon

Description

DSR-C is a grade of reactivated carbon designed for the removal of organic contaminants from industrial wastewater or process water. The carbon is manufactured by the reactivation of bituminous coal-based products to produce a high-density, high surface area durable product capable of withstanding repeated cycles of use and reactivation.

DSR-C is effective in a wide range of applications and fluctuating flows providing reliable removal of dissolved organic compounds, and is screened prior to packaging to ensure consistent performance and low pressure drop.

Applications

- Point source treatment to remove chemicals
- Pre-treatment to biological waste treatment systems
- Product recovery from wastewater
- Recycling wastewater
- Polishing effluent from biological waste treatment systems
- Providing total wastewater treatment

Design Considerations

The design of an activated carbon adsorption system is dependent on the adsorbate type, influent concentration, temperature, flow rate, performance objective, and other factors. Calgon Carbon has experience designing systems and can help evaluate the suitability of DSR-C to satisfy specific needs and assist in the design of an adsorption system. In addition to the supply of activated carbon, Calgon Carbon offers a complete line of standardized, pre-engineered adsorption systems. For additional information on adsorption capacity of organic compounds, please contact the Inside Sales Representative for your area by calling 1-800-4-CARBON.

Specifications

Iodine Number, mg/g (min)	800
Ash, weight % (max)	9
Moisture, weight % (max)	2
Apparent Density, g/cc (max)	0.60
Screen Size, US Sieve Series, weight %	
Smaller than 30 mesh (max)	5

Product Options

In addition to DSR-C, Calgon Carbon offers a variety of products and services to meet your treatment requirements:

Granular Carbon Products


- FILTRASORB® 300 & 400 - virgin liquid phase products.
- REACT PH® - for pH sensitive applications.
- React AW - for acid purification.

Equipment Products

- Standardized, pre-engineered adsorption systems capable of treatment flows from 1 gpm to 1400 gpm.
- Custom engineered systems - to meet unique treatment requirements.

Service Products

- Technical services including design assistance, calculations of carbon use rates, laboratory and pilot studies, start-up and operations assistance.
- On-site exchange services and reactivation service reduce labor requirements and minimize disposal cost.

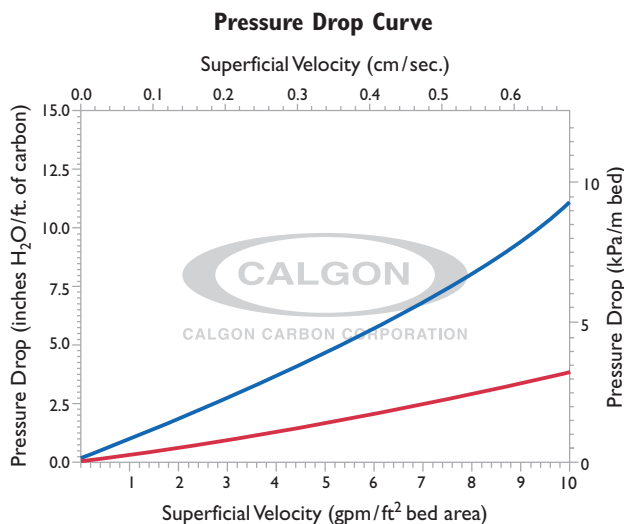

Liquid down-flow through DSR-C 8x30 carbon

DSR-C is not for use in potable water or food grade applications.

Carbon and Process Media

Visit our website at www.calgoncarbon.com, or call 800-422-7266 to learn more about our complete range of products and services, and obtain local contact information.

DSR-C 8X30

Granular Activated Carbon

Features

Raw Material:

- Metallurgical grade, bituminous coal based

Miscellaneous:

- Reactivated product
- Recyclable product
- High surface area/pore structure

- Product is screened prior to packaging

Benefits

- Produces a strongly adsorbing pore structure for a broad range of contaminants and concentrations
- Economical alternative to virgin carbon
- Provides ultimate disposal of pollutants
- Eliminates landfill costs and concerns
- Propagates the cycle of responsible resource utilization
- Efficient in removing a wide range of dissolved organic compounds
- Reliable - accommodates variations in flows or concentrations
- Results in less fines and lower pressure drop
- Minimizes backwashing

Packaging

1,000 lb. Super Sacks
Bulk Trucks

Safety Message

Wet activated carbon preferentially removes oxygen from air. In closed or partially closed containers and vessels, oxygen depletion may reach hazardous levels. If workers are to enter a vessel containing carbon, appropriate sampling and work procedures for potentially low oxygen spaces should be followed, including all applicable Federal and State requirements.

Limitations of Liability

The Supplier's liability and the Purchaser's exclusive remedy for any cause of action arising out of this transaction, including, but not limited to, breach of warranty, negligence and/or indemnification, is expressly limited to a maximum of the purchase price of spare parts or equipment sold hereunder. All claims of whatsoever nature shall be deemed waived unless made in writing within forty-five (45) days of the occurrence giving rise to the claim. In no event shall the Supplier, for any reason or pursuant to any provision of the warranty, be liable for incidental or consequential damages or damages in excess of the purchase price, nor shall the Supplier be liable for loss of profits or fines imposed by governmental agencies.

DSR-C is not for use in potable water or food grade applications.

Visit our website at www.calgoncarbon.com



CALGON CARBON CORPORATION
Calgon Carbon Corporation
P.O. Box 717
Pittsburgh, PA USA 15230-0717
1-800-422-7266
Tel: 412-787-6700
Fx: 412-787-6713

**Chemviron
Carbon**

European Operations of Calgon
Carbon Corporation
Zoning Industriel C de Feluy
B-7181 Feluy, Belgium
Tel: + 32 (0) 64 51 18 11
Fx: + 32 (0) 64 54 15 91

Your local office

CPM-LC604-0604

©Copyright 2004 Calgon Carbon Corporation, all rights reserved.