

FILTRASORB® 820

Granular Activated Carbon

Applications



FILTRASORB 820 is used primarily to treat surface water sources for the production of drinking water. This carbon is a coarser mesh media and is generally used in deep bed filters where pressure drop may be a concern. FILTRASORB 820 functions as a dual purpose media providing both filtration and adsorption.

Description

FILTRASORB 820 is a granular activated carbon developed by Calgon Carbon Corporation for the removal of dissolved organic compounds from water and wastewater as well as industrial and food processing streams. These contaminants include taste and odor compounds, organic color, total organic carbon (TOC), and industrial organic compounds such as TCE and PCE. This activated carbon is made from select grades of bituminous coal through a process known as reagglomeration to produce a high activity, durable, granular product capable of withstanding the abrasion associated with repeated backwashing, hydraulic transport, and reactivation for reuse. Activation is carefully controlled to produce a significant volume of both low and high energy pores for effective adsorption of a broad range of high and low molecular weight organic contaminants. FILTRASORB 820 is also formulated to comply with all the applicable provisions of the AWWA Standard for Granular Activated Carbon (B604), the stringent extractable metals requirements of ANSI/NSF Standard 61, and the Food Chemicals Codex.

Features / Benefits

- Calgon Carbon's reagglomerated coal-based granular activated carbons have several properties which provide superior performance in a wide range of applications
- Produced from a pulverized blend of high quality bituminous coals resulting in a consistent, high quality product
- The activated carbon granules are uniformly activated through the whole granule, not just the outside. This results in excellent adsorption properties and constant adsorption kinetics in a wide range of applications
- The reagglomerated structure ensures proper wetting while also eliminating floating material
- High mechanical strength relative to other raw materials, thereby reducing the generation of fines during backwashing and hydraulic transport
- Carbon bed segregation is retained after repeated backwashing, ensuring the adsorption profile remains unchanged and therefore maximizing the bed life
- Reagglomerated with a high abrasion resistance, which provides excellent reactivation performance
- High density carbon resulting in a greater adsorption capacity per unit volume

Specifications¹

FILTRASORB 820

Iodine Number, mg/g	900 (min)
Moisture by Weight	2% (max)
Effective Size	1.0–1.2 mm
Uniformity Coefficient	1.5 (max)
Abrasion Number	75 (min)
Trace Capacity Number, mg/cc	9 (min)
Screen Size by Weight, US Sieve Series	
On 8 mesh	5% (max)
Through 20 mesh	4% (max)

¹Calgon Carbon test method

Typical Properties*

FILTRASORB 820

Apparent Density (tamped)	0.56 g/cc
Water Extractables	<1%
Non-Wettable	<1%

*For general information only, not to be used as purchase specifications.

Safety Message


Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.

1.800.4CARBON calgoncarbon.com

© Copyright 2015 Calgon Carbon Corporation, All Rights Reserved
DS-FILTRA82016-EIN-E1


Typical Pressure Drop

Down Flow Pressure Drop at 13C/55°F
Based on a backwashed and segregated bed

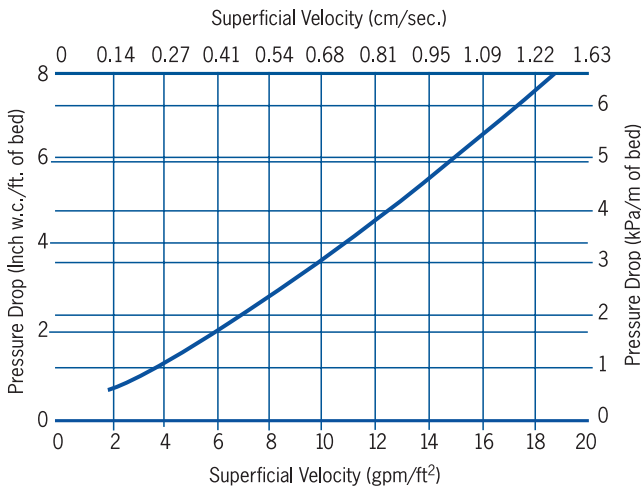

Typical Bed Expansion During Backwash

Bed Expansion During Backwash at 13C/55°F
Based on a backwashed and segregated bed

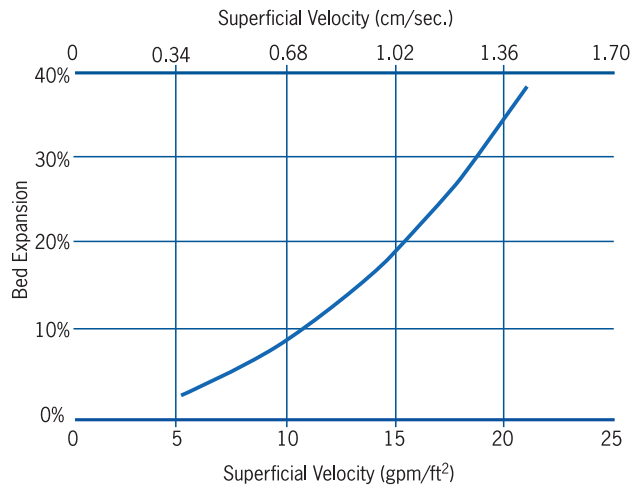

Design Considerations

As a replacement for existing filter media, the conversion to FILTRASORB 820 activated carbon imposes no major changes to a plant's normal filtration operations. If more contact time is required, the height of the backwash troughs can be increased. Calgon Carbon Corporation can also provide complete modular adsorption systems as an add-on treatment stage if required.

Safety Message

Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.