

# SENTINEL® 48

Ultraviolet Drinking Water Disinfection System



## Applications



Drinking Water  
(Potable)



UV

UV disinfection with SENTINEL® provides a proven barrier to harmful pathogens that can be present in source water. This includes bacteria, viruses and chlorine-resistant protozoa such as Cryptosporidium and Giardia. SENTINEL disinfection is a chemical free physical process producing zero disinfection byproducts and is more cost effective than ozone or membranes.

## Description

Designed to treat flows up to 51 million gallons per day (195 MLD), the Sentinel 48 can effectively disinfect drinking water in medium to large sized treatment plants. The Sentinel 48 uses medium-pressure lamp technology to achieve greater than 4 log inactivation of Cryptosporidium, Giardia and virus in drinking water. Medium-pressure lamp technology allows the Sentinel 48 to be compact with a small footprint. This can provide a significant advantage to water treatment plants looking for a system that can be easily retrofitted into existing treatment systems.

The Sentinel 48 system features include independent third-party-certified UV intensity sensors to assure accurate delivery of UV dose, an automatic quartz sleeve cleaning system and a fully automated control system. The Sentinel 48 was designed using advanced computational fluid dynamics allowing for optimal lamp

and baffle placement to ensure maximum reactor performance and operational efficiency. The Sentinel 48 has undergone third-party validation under the U.S. EPA LT2 Enhanced Surface Water Treatment Rule guidelines.


## Features/Benefits

- Lamps: High intensity medium-pressure lamps
- Lamp Intensity Sensors: DVGW-certified germicidal sensors (one per lamp)
- Cleaning System: Automatic Quickwipe™ system
- Automated Operation and Control System: PLC-based operation and control
- Reliable: robust long-life electromagnetic ballasts with superb voltage tolerance
- Safe: automatic emergency shut down
- Easily Installed: power cabinets may be located up to 500 feet (150 meters) from reactor
- Validated per US EPA UV Disinfection Guidance Manual
  - with multiple organisms MS2, T1 and T7 to bracket Cryptosporidium
  - with 2, 3, 4, 5, 9 or 18 lamps operating for efficient turndown capability
- Can be used as a combined AOP/Disinfection reactor – e.g. for Taste and Odor control with 9 or 18 lamps for high dose AOP during T&O events and 2 to 5 lamps for disinfection (see Sentinel 48 AOP Data Sheet)

## Specifications

### SENTINEL 48

Inlet/Outlet	48" (1200 mm) – AWWA Class B flange
Flow	Validated up to 51 MGD ( 195 MLD)
%UVT at 254 nm	Validated down to 59%T
Number of lamps	up to 18
Total Lamp Power	40-360kW
Turndown	from 360 kW (18 lamps) to 16 kW (2 Lamps at 40% power)
Power Supply	400-600 VAC
Reactor Body	316L stainless steel
Maximum System Pressure	50 psi (3.4 bar)
Sensors	DVGW-style germicidal (one per lamp)
Wipers	Quickwipe stainless steel wipers

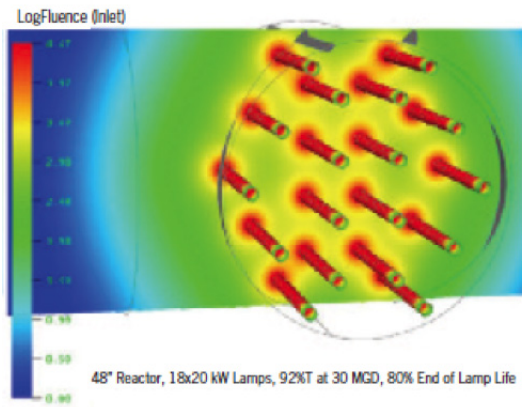

## Dimensions

