

# FILTRASORB® 400

Granular Activated Carbon

## Applications



FILTRASORB 400 activated carbon can be used in a variety of liquid phase applications for the removal of dissolved organic compounds. FILTRASORB 400 has been successfully applied for over 40 years in applications such as drinking and process water purification, wastewater treatment, and food, pharmaceutical, and industrial purification.

## Description

FILTRASORB 400 is a granular activated carbon for the removal of dissolved organic compounds from water and wastewater as well as industrial and food processing streams. These contaminants include taste and odor compounds, organic color, total organic carbon (TOC), industrial organic compounds such as TCE and PCE, and PFAS.

This activated carbon is made from select grades of bituminous coal through a process known as reagglomeration to produce a high activity, durable, granular product capable of withstanding the abrasion associated with repeated backwashing, hydraulic transport, and reactivation for reuse. Activation is carefully controlled to produce a significant volume of both low and high energy pores for effective adsorption of a broad range of high and low molecular weight organic contaminants.

FILTRASORB 400 is formulated to comply with all the applicable provisions of the AWWA Standard for Granular Activated Carbon (B604) and Food Chemicals Codex. This product may also be certified to the requirements of NSF/ANSI 61 for use in municipal water treatment facilities. Only products bearing the NSF Mark are certified to the NSF/ANSI 61 - Drinking Water System Components - Health Effects standard. Certified Products will bear the NSF Mark on packaging or documentation shipped with the product.

## Features / Benefits

- Produced from a pulverized blend of high quality bituminous coals resulting in a consistent, high quality product.
- Carbon granules are uniformly activated through the whole granule, not just the outside, resulting in excellent adsorption properties and constant adsorption kinetics.
- The reagglomerated structure ensures proper wetting while also eliminating floating material.
- High mechanical strength relative to other raw materials, thereby reducing the generation of fines during backwashing and hydraulic transport.
- Carbon bed segregation is retained after repeated backwashing, ensuring the adsorption profile remains unchanged and therefore maximizing the bed life.
- Reagglomerated with a high abrasion resistance, which provides excellent reactivation performance.
- High density carbon resulting in a greater adsorption capacity per unit volume.

## Specifications<sup>1</sup>

### FILTRASORB 400

Iodine Number, mg/g	1000 (min)
Moisture by Weight	2% (max)
Effective Size	0.55–0.75 mm
Uniformity Coefficient	1.9 (max)
Abrasion Number	75 (min)
Screen Size by Weight, US Sieve Series	
On 12 mesh	5% (max)
Through 40 mesh	4% (max)

<sup>1</sup>Calgon Carbon test method

## Typical Properties\*

### FILTRASORB 400

Apparent Density (tamped)	0.54 g/cc
Water Extractables	<1%
Non-Wettability	<1%

\*For general information only, not to be used as purchase specifications.

## Safety Message


Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.

1.800.4CARBON calgoncarbon.com

© Copyright 2018 Calgon Carbon Corporation, All Rights Reserved  
DS-FILTRA40018-EIN-E1


## Typical Pressure Drop

Based on a backwashed and segregated bed

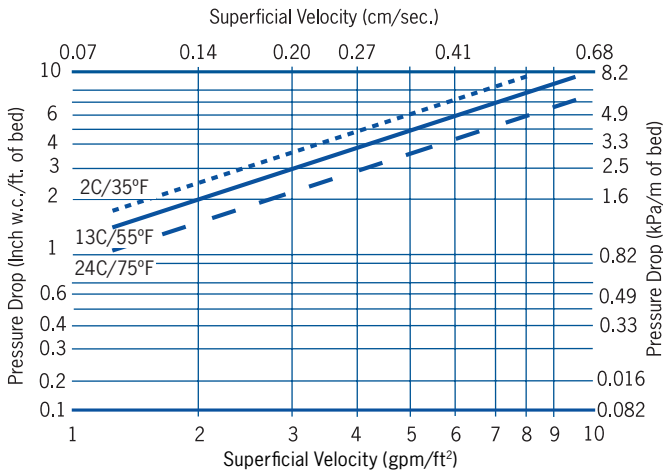

## Typical Bed Expansion During Backwash

Based on a backwashed and segregated bed

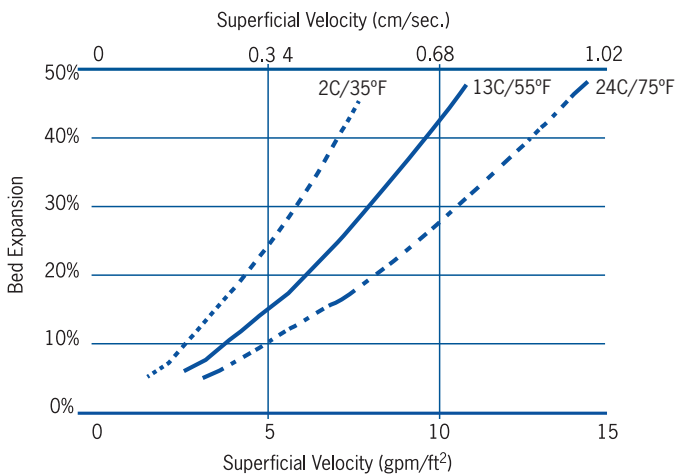

## Conditioning and Backwashing

Backwashing and conditioning fresh GAC before placing into operation is critical to GAC performance. The reasons for backwashing before placing fresh media online are to: (1) size segregate the media so subsequent backwashing will return the media to the same relative position in the bed, (2) remove any remaining air from the bed, and (3) remove media fines which can lead to excessive pressure drop and flow restriction. In addition, proper backwashing is a crucial step to collecting the most representative and meaningful post-start up data on compounds of interest, such as metals listed in the NSF/ANSI 61 standard.

Below are the recommended steps for proper conditioning and backwashing of GAC based on Filtrasorb 400 GAC being backwashed at 55°F:

1. Fully submerge GAC bed in clean, contaminant free water for at least 16 hours (overnight)
2. Open backwash inlet and begin up-flow at 3 gpm/ft² for 2 minutes
3. Increase flow to 5 gpm/ft² and maintain for 2 minutes
4. Increase flow to 7 gpm/ft² and maintain for 2 minutes
5. Increase flow to 8.5 gpm/ft² and maintain for 30 minutes\*
6. Decrease flow to 7 gpm/ft² and maintain for 2 minutes
7. Decrease flow to 5 gpm/ft² and maintain for 2 minutes
8. Decrease flow to 3 gpm/ft² and maintain for 2 minutes
9. Close backwash inlet and stop flow

\*Duration representative of initial backwash conditions. Required duration during operational backwashes can be shorter but will vary by utility, solids load, and GAC throughput. Contact Calgon Carbon for more information"

## Design Considerations

FILTRASORB 400 activated carbon is typically applied in down-flow packed-bed operations using either pressure or gravity systems. Design considerations for a treatment system is based on the user's operating conditions, the treatment objectives desired, and the chemical nature of the compound(s) being adsorbed.

## Safety Message

Wet activated carbon can deplete oxygen from air in enclosed spaces. If use in an enclosed space is required, procedures for work in an oxygen deficient environment should be followed.

1.800.4CARBON calgoncarbon.com

© Copyright 2018 Calgon Carbon Corporation, All Rights Reserved  
DS-FILTRA40018-EIN-E1